

Clarke®

Clarke®

LV-30 Litter Vacuum®




LV-30

Litter Vacuum®

Clarke®

Division of
ALTO®

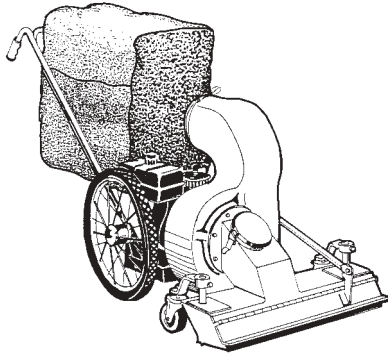

KEY FEATURES

- Rugged Polydur® and steel construction
- Adjustable intake housing
- Tough dirt and debris passing impeller system
- Designed to clean in one pass
- Operates on all types of terrain

SPECIFICATIONS

Engine	6 HP Tecumseh or 5.5 HP Honda
Cleaning Path	30 in (76.2 cm)
Collector/Filter Bag	(Standard Napped Cotton) 11 cu. Ft (3.3 cu m) with 60 in (152 cm zipper)
Impeller	12 in (30.5 cm) aluminum alloy
Air Movement	900 CFM
Impeller Speed	3200 rpm
Wheels (rear)	(2) 20 in (50.8 cm) dia cycle type, or (2) 5.30/4.50 x 6 in (15.2 cm) two ply pneumatic
Wheels (front)	(2) 4 in (10.2 cm) swivel caster
Main Frame	Formed and welded steel
Intake Housing	Fabricated steel
Impeller Housing	Rotational molded Polydur®
Dimensions (L x W x H)	75 x 30-1/4 x 41-1/2 in (190.5 x 76.8 x 105.4 cm)
Weight	167 lb (75.8 kg)
Shipping Weight	194 lb (88 kg)

PRODUCT

- Available with either 6 HP Tecumseh or 5.5 hp Honda OHV
- Large 12 inch (30.5 cm) impeller
- Polydur® impeller housing resists abrasion and will not rust
- Choice of wheels:
Large 20 inch (50.8 cm) cycle type for hard surfaces, curbs, gutters or wide 5.30/4.50 pneumatic type for turf
- Adjustable caster wheels adjust outward, or up and down

EASE OF USE

- Removable handle for easy storage
- Large easy rolling wheels
- Convenient trap door flips open for large debris

- Comfortable control handle reduces operator fatigue
- Easy to empty zipper bag
- Front casters adjust with simple spring loaded pull pins
- Dual front swivel casters are easy to steer and provide stability on uneven surfaces
- Easy clean engine air filter

PRODUCTIVITY

- Wide 30 inch (76.2 cm) cleaning path covers more area
- Large 12 inch (30.5 cm) impeller generates up to 900 CFM for quick pick-up
- Large 11 cubic foot (3.3 cubic m) capacity collector bag holds more debris
- Optional hoses and nozzles provide means of debris pick-up from hard-to-reach areas (window wells, shrubbery, along fences)

SAFETY

- Polydur® impeller housing absorbs shocks from debris passing through the impeller
- Discharge opening in impeller housing has a molded-in deflector that deflects debris downward into the collector bag for added operator protection
- Impeller constructed of spark resistant aluminum alloy

OPTIONS/ACCESSORIES

- 4 inch (10.2 cm) intake hoses and nozzles
- 6 inch (15.2 cm) intake hoses and nozzles
- Bag support assembly
- Open weave leaf bag
- Contact Clarke® Distributor for complete line of accessories

Clarke®

2100 Hwy. 265
Springdale, AR 72764
www.clarkeus.com

DISTRIBUTED BY:

Customer Service: 1.800.253.0367
Fax Orders to: 1.800.825.2753
Technical Service: 1.800.356.7274

©2003 ALTO U.S. Inc., All Rights Reserved. Specifications subject to change without notice. P/N 79732A

